

# SEPARATELY EXCITED ELECTRONIC MOTOR SPEED CONTROLLER



CURTIS

MODEL 1243 SepEx®



## DESCRIPTION

Curtis PMC Model 1243 SepEx® programmable controllers provide smooth and seamless regenerative control of separately excited motors. An advanced MOSFET power section, combined with a sophisticated microprocessor provides very high efficiency, silent operation and reduced motor and battery losses.

## APPLICATION

Curtis PMC Model 1243 SepEx® controllers are designed for small material handling and other light industrial vehicles using separately excited motors. These include low lifts, stackers, personnel carriers and other industrial vehicles.

## QUALITY COMPLIANCE

Manufactured under ISO 9001 certified Quality Management System. UL Recognized Component Status.

## FEATURES

### Unparalleled Driving and Braking Feel

- Regenerative braking allows shorter stopping distances, increases usable battery energy, and reduces motor heating. The half bridge armature drive topology allows regenerative braking down to zero vehicle speed.
- "Ramp Restraint" feature provides automatic electronic braking that restricts vehicle movement while in neutral.
- Vehicle speed is controlled by the throttle, at all times including down hills.
- "Load Compensation" provides improved loaded versus unloaded speed regulation by compensating for losses in the armature.

### Fully Programmable

- Fully compatible with the Curtis Model 1307 programmer for programming, test, and diagnostic information.
- MultiMode™ feature allows four user selectable vehicle operating profiles. Each profile has separate drive current limits, brake current limits, acceleration rates, brake rates and maximum speeds.

### Easy to Install and Maintain

- No direction contactors are required. The full bridge field driver topology allows motor reversing without the use of direction contactors.
- Simple wiring and installation by the elimination of the direction contactors and the use of positive battery connections for all inputs and driver outputs.
- Can be configured to match most separately excited motors and vehicle applications.
- An auxiliary driver output supports an electro-magnetic brake, pump contactor, or hour meter. A programmable delay allows for customization of this driver output.
- An integral fault LED flashes helpful error code information. Two fault outputs provide diagnostic information for dash mounted displays. Diagnostic faults are logged and the history is viewable through a Curtis Model 1307 programmer.

**CURTIS INSTRUMENTS, INC.**  
200 KISCO AVENUE  
MT. KISCO, NY 10549  
USA  
TEL (914) 666-2971  
FAX (914) 666-2188

**CURTIS PMC**  
235 EAST AIRWAY BLVD.  
LIVERMORE, CA 94551  
USA  
TEL (925) 961-1088  
FAX (925) 961-1099

**CURTIS INSTRUMENTS, (UK) LTD.**  
5 UPPER PRIORY STREET  
NORTHAMPTON NN1 2PT  
ENGLAND  
TEL 44 (0) 1604-629755  
FAX 44 (0) 1604-629876

**CURTIS INSTRUMENTS INDIA  
PRIVATE LTD.**  
1199, GHOLE ROAD  
PUNE 411004, INDIA  
TEL 91 (0) 20-5531288  
FAX 91 (0) 20-5539192

## FEATURES *continued*

### Powerful Safety Features

- Meets or exceeds EEC fault detection requirements. Circuitry and software to detect faults in the throttle circuit and MOSFET drive circuits help prevent unsafe operation.
- Emergency reverse feature causes quick vehicle reversal upon activation. The emergency reverse input wire can also be checked for continuity.
- Programmable HPD and SRO interlock options ensure proper startup sequence.
- Complies with the CE standards for electromagnetic compatibility in emissions and susceptibility.
- Active power on self test and continuous diagnostics during operation. Internal and external watchdog circuits ensure proper software operation.
- All inputs and outputs are fully protected.


## MODEL CHART

CURTIS PMC MODEL	VOLTAGE (volts)	ARMATURE RATING* (amps)		FIELD RATING (amps)	
		2 minutes	1hr	2 minutes	1hr
1243-42XX	24-36	200	80	25	15
1243-43XX	24-36	300	100	25	15
1243-52XX	36-48	250	80	15	9

\*Armature rating is for both drive and regen current




Please consult Curtis PMC for availability of other models with different ratings.

## TYPICAL WIRING DIAGRAM

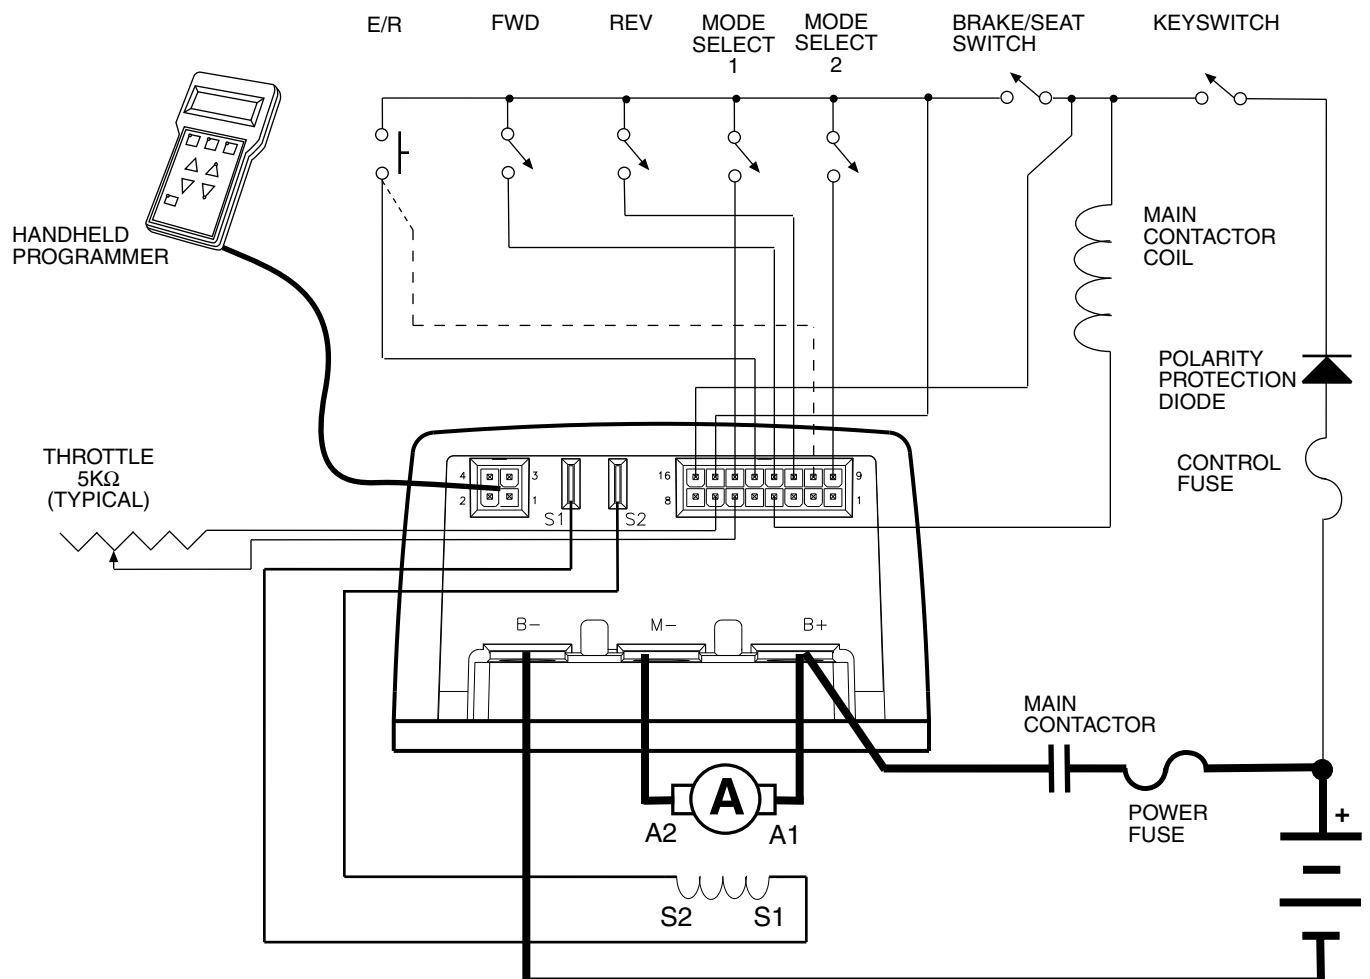

# MODEL 1243 SepEx<sup>®</sup>

## DIMENSIONS mm

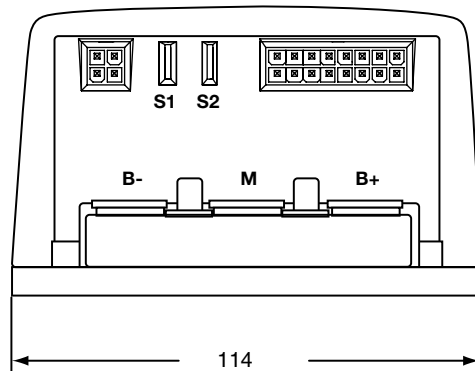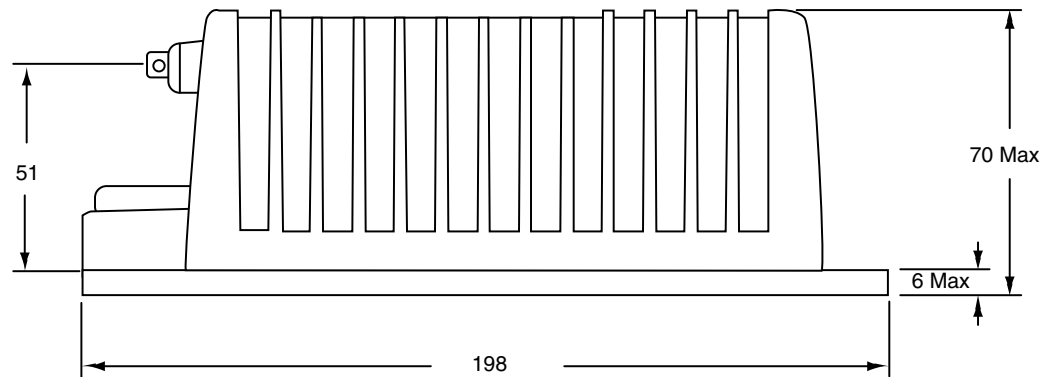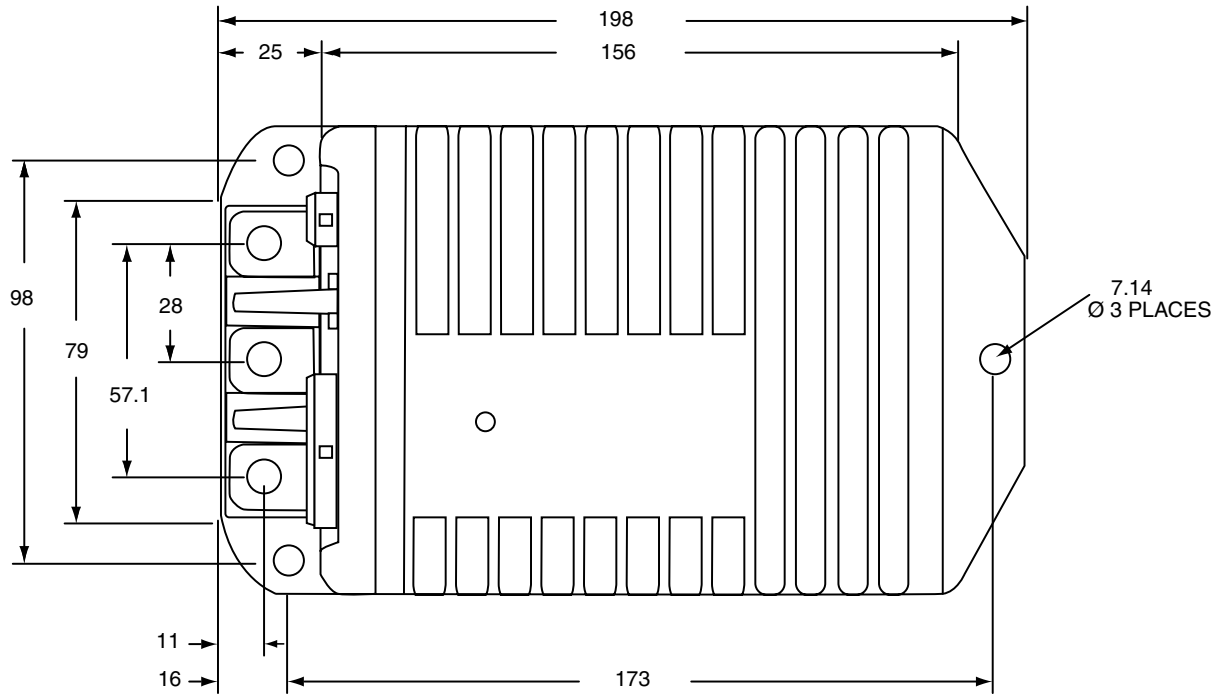

**WARRANTY** Two year limited warranty from time of delivery.



is a trademark of Curtis Instruments, Inc.

CURTIS

Specifications subject to change without notice

©2004 Curtis Instruments, Inc.

50045 REV C 4/04